



HJX-PRO-S80

Josper 将炭烤架和烤箱优雅的组合在一款设备上。100%使用木炭。独特的封闭式烧烤设计。可设定炭烤不同熟度。灵活、坚固、简单使用，带有前开门系统。温度控制通风系统。

Josper is an elegant combination of a grill and an oven in a single machine. It works 100% with charcoal. A unique closed barbecue design. Different levels of grilling. Flexible and robust, easy to use, with a front opening door system. Vent system for temperature control.


适合人数 ± Recommended for ±	80 人 80 dinners
起火时间 Fire up time	平均30分钟 30 min average
木炭日消耗量 Charcoal daily consumption	22-26.5磅 22 to 26.5 lb
烧烤时间持久度 Performance	9h
每小时食物产量 Production per hour	平均 132 磅 132 lb average
烘烤温度 Broiling temperature	250 至 350 °C 482 a 662 °F
Gn 托盘中的烤架容量 Grill rack capacity in Gn trays	1xGN1/1
标准热输出 Nominal heat output	8.8 kW 11.8 hp
烟排放量 Flue gas mass flow	19.36 克/秒 0.68 盎司/秒
净重 Net weight	180 kg 396 lb




★ 图像可能包含可选配件。
Images may contain optional equipment.

所包含的配件

INCLUDED ACCESSORIES




不锈钢烤架 / Ref. 240024
Inox grill rack / Ref. 240024



铲子 / Ref. 0401INOX
Poker / Ref. 0401INOX



JOSPER 火钳 / Ref. 0423
Josper tongs / Ref. 0423





金属刷 / Ref. 8224
Metallic brush / Ref. 8224

★ 所有 Josper 产品都使用专门的木炭。
All Josper products work exclusively with charcoal.

烤架尺寸

GRILL RACK MEASUREMENTS

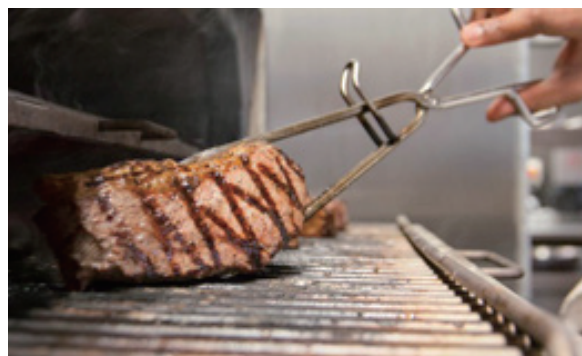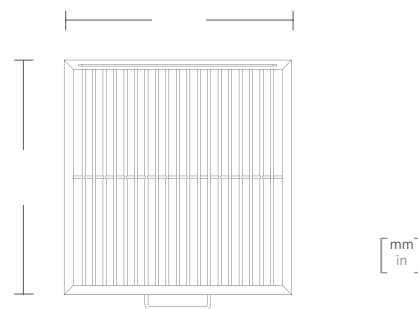

FT-C01925-05

可选配置和附件
OPTIONAL CONFIGURATIONS & ACCESSORIES



W- 保温架子 / Ref. 230000
W- WARMER / Ref. 230000





T - 桌子 / Ref. 200015
T - TABLE / Ref. 200015



TD - 桌子+抽屉 / Ref. 200016
TD - TABLE WITH DRAWER / Ref. 200016

安装
INSTALLATION

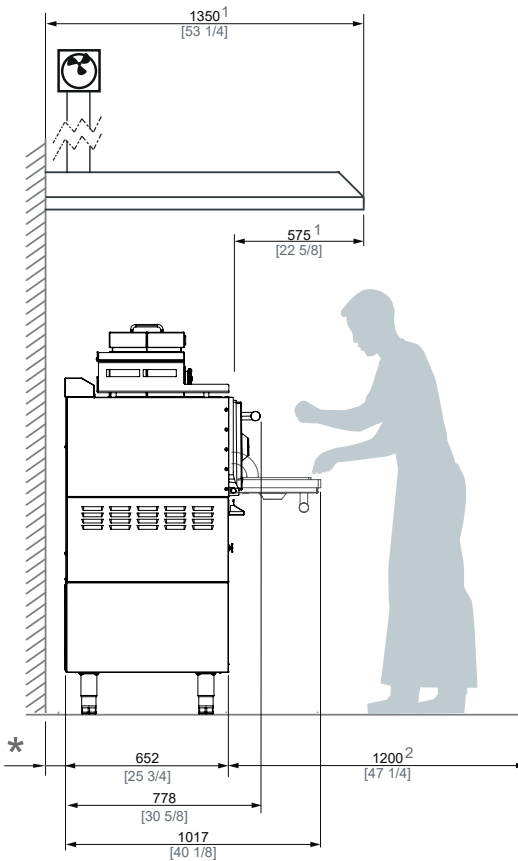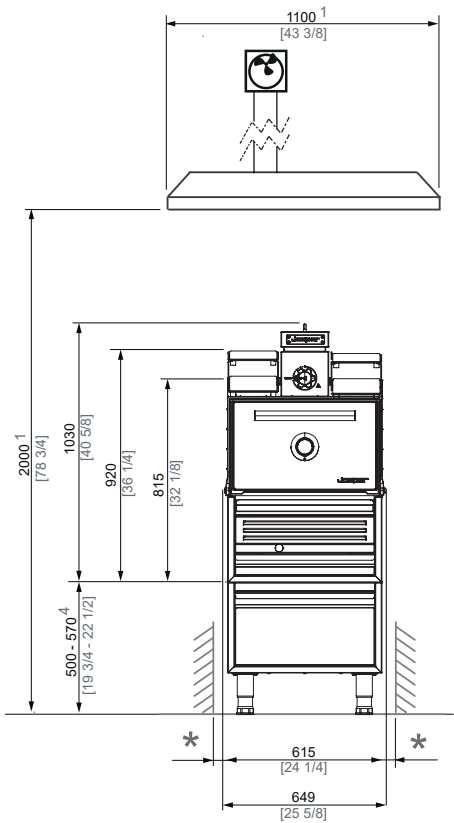

* 与易燃物体保持的最小距离 MINIMUM DISTANCE TO FLAMMABLE ELEMENTS	300 mm	12 in
* 与易燃物体保持的最小距离 MINIMUM DISTANCE TO FLAMMABLES ELEMENTS	100 mm	4 in

- 1 推荐罩子的最小尺寸
RECOMMENDED HOOD'S MINIMUM DIMENSIONS
- 2 推荐厨师的工作空间
RECOMMENDED CHEF'S WORKING SPACE
- 3 无桌子烤箱的建议安装高度
RECOMMENDED HEIGHT TO INSTALL THE OVEN WITOUT TABLE

Jospoer 保留根据适用于其设备的开发和改进对目录、价格表和宣传材料进行修改的权利。
Jospoer reserves the right to make modications to catalogues, pricelists and promotional material according to the development and improvements applied to its equipment.